



Z62-D360.93 S3

Pneumatic direct change

Item no. **10303048**

HF-Spindle for high-speed milling, -grinding, -drilling, -engraving

Bearings

Hybrid ball bearing (pcs)	3
Lifetime lubricated	maintenance free

Motor

Motor technology	3-phase asynchronous drive (no brushes or sensors)
Frequency	1.000 Hz
Motor poles (pairs)	1
Rated rotation speed	60.000 rpm
Acceleration/braking value Per second	10 000 rpm (other values by consultation)


Power values

Liquid cooled


	Pmax./5s	S6-60%	S1-100%	
Rated power	2,6	1,9	1,6	[kW]
Torque	0,579	0,405	0,37	[Nm]
Voltage	185	185	185	[V]
Current	15,5	10,9	10,3	[A]

Z62-D360.93 S3

Pneumatic direct change
Item no. **10303048**

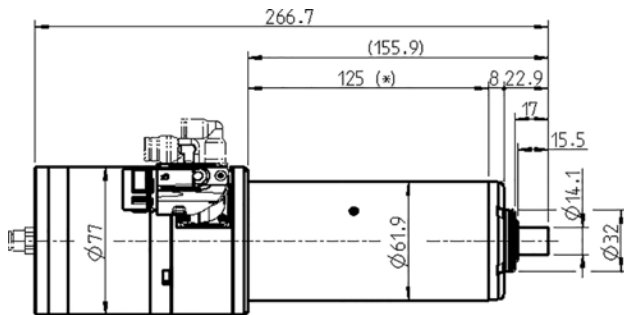

Dimensions

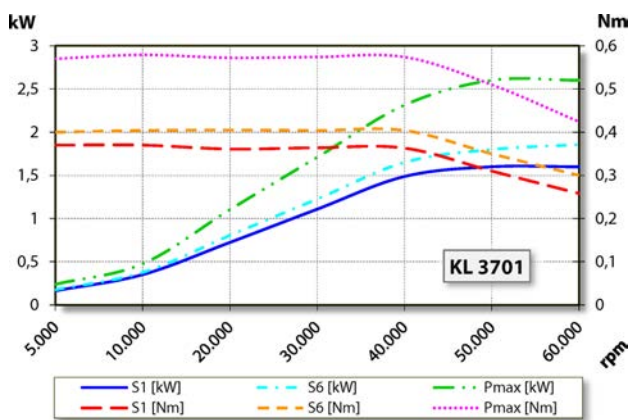

Performance Diagram

Liquid cooled

Measurement of power is funded by in-house testing.

Characteristics

Motor protection	PTC 130°C
Housing	Stainless steel
Housing diameter	61,9 mm
Cooling	Liquid cooled
Ambient temperature	+ 10°C ... + 45°C
Sealing air	
Protection category (sealing air turned on)	IP54
Blow air through collet during tool change	
Tool change	Pneumatic direct change
Collet type	8/5°
	Optional accessories
Clamping range up to	6 mm (1/4")
Clockwise	
Coupler plug	8-pin (SpeedTEC)
Weight	~ 4,6 kg
Inner taper run out	< 1 µ